


# 5W Rated 3dB Low PIM Attenuator Array

## LPA-5W3-6R

This product is a 3dB Low PIM grade attenuator capable of handling up to 5W, with 6 units arranged in a 19" 1U enclosure.

- 1695-4200 MHz
- 5W Power Rating
- 6 Attenuators in 19" 1U
- -155dBc Low PIM
- IP52
- 4.3-10(F) to 2.2-5 (F)

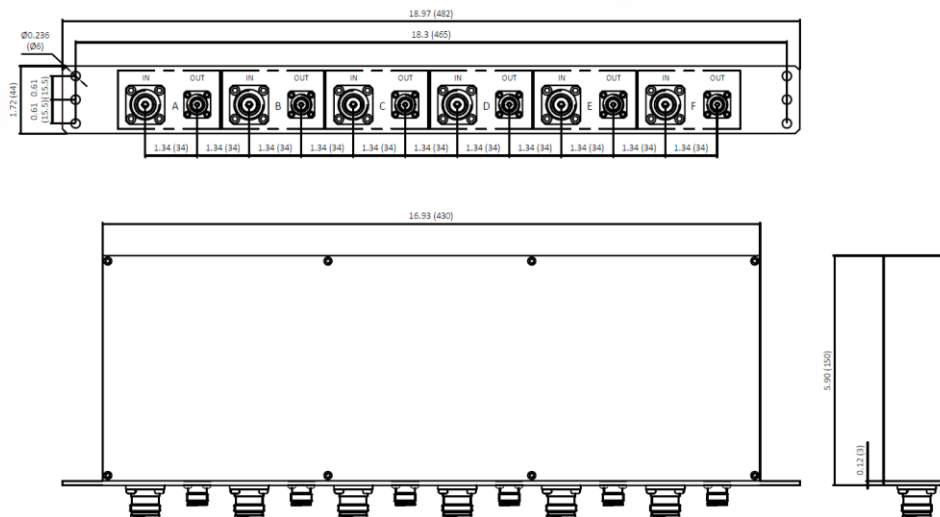

Parameter	Specifications
Model	LPA-5W3-6R
Freq. Range [MHz]	1695-4200
Fixed Attenuation [dB]	3
Accuracy [dB]	±0.6
Return Loss [dB]	17.7 min.
Power Rating [W]	5 Avg.
IP Rating	IP52
PIM [dBc]	-155 @ Uplink Bands with 33dBm x 2 tones
Operating Temp. [°F]	-22 to +149
RF Connector	Input: 4.3-10 (F), Output: 2.2-5 (F)
Size (WxHxD) /Weight [lbs]	18.97" x 5.90" x 1.72" / 5

\* Specifications are subject to change without prior notification.

Rev.1