

# CSC Pentaplexer for AT&T (3.45GHz & C-Bands)

CSC-ATT-PEX

CSC (Carrier Specific Combining) Series offers passive modular carrier combiner solution for Small Cell and D-RAN architectures which can scale seamlessly from a Single to a Neutral Host System.

- 700&850/PCS/AWS/3.45-3.55GHz/3.7-4.2GHz Pentaplexer for AT&T
- Modular design and seamlessly integrates with CSC series of combiners
- 19" Rack-Mount with CSC Guide Rail Bracket
- Wall-Mountable with wall bracket option
- Low PIM Rated
- IP67 Outdoor Rated
- High Reliability, RoHS compliant



Parameter	Specifications				
Model	CSC-ATT-PEX				
Freq. Range [MHz]	700/850	PCS	AWS	A. 110 (DoD)	C-Band
	698-894	1850-1995	1710-1780 2110-2180	3450-3550	3700-4200
Insertion Loss [dB]	0.5	0.5	0.5	0.8	0.8
Port Isolation [dB]	50				
Return Loss [dB]	18				
PIM [dBc]	-161				
Power Rating [W]	63				
IP Rating	IP67				
Operating Temp. [°F]	-13 to +140				
RF Connector	4.3-10 Female				
Size (W x H x D)	8.68" x 1.72" x 8.74"				
Weight [lb]	7.72				


\* Specifications are subject to change without prior notification.

Rev.2

# CSC Pentaplexer for AT&T (3.45GHz & C-Band)

CSC-ATT-PEX

## Mechanical Drawing

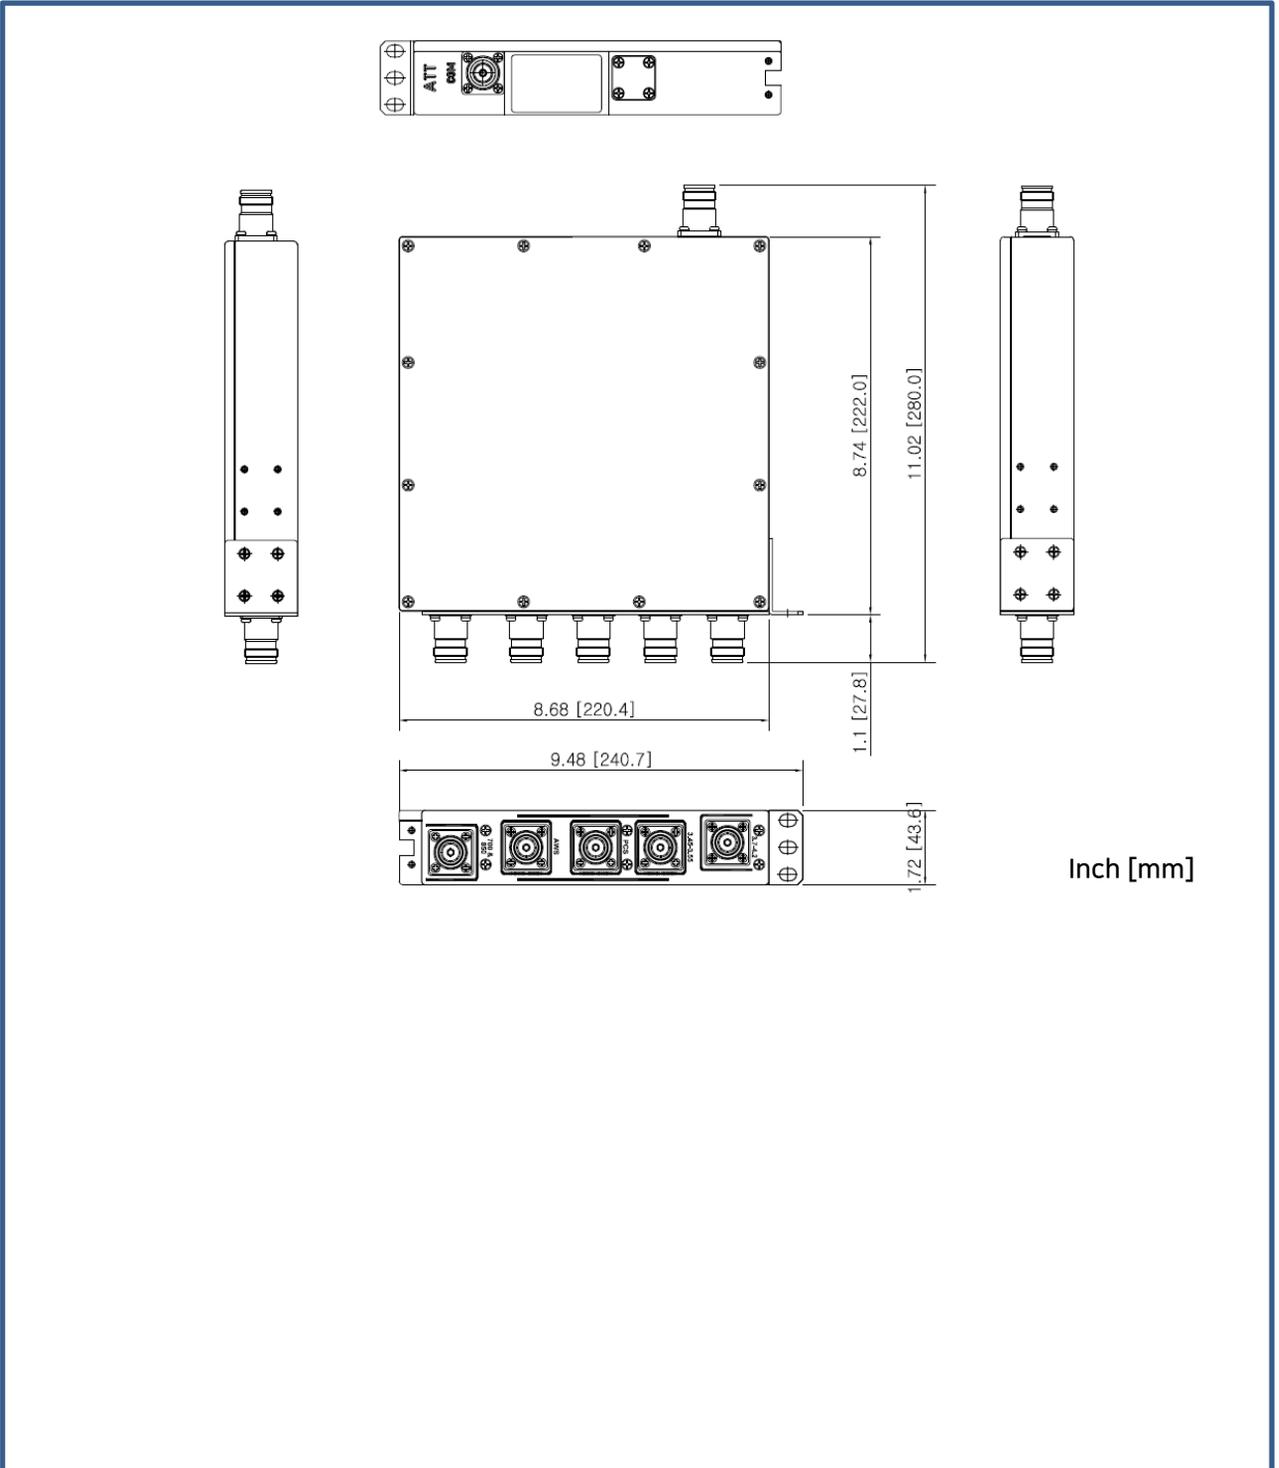

Rev.2